

c/o Plastics Recyclers Europe Avenue de Broqueville 12 1150 Brussels, Brussels Phone: +32 2 786 39 08 info@recyclass.eu www.recyclass.eu

VOID Technologies
RECYCLASS TECHNOLOGY APPROVAL

Brussels, 02 August 2023

## **DISCLAIMER**

RecyClass recognition applies only to VOID Technologies 'VO+ PE 1300 Series Voiding Agent' technology reported in Annex I. The recyclability assessment therefore does not refer to the testing of a specific packaging using this technology. Any specific packaging using this technology would need to be tested individually to demonstrate that the system of resin, adjuvants, label, closure, and printing conforms to the RecyClass Recyclability Evaluation Protocol for PE films, and that it is sorted in the PE flexible stream at the state-of-art sorting plants in Europe.

Publication of results of testing of this technology MUST clearly include all the conditions listed in the approval letter. Partial reporting of the conditions is forbidden.

Additionally, any change in the formulation of the technology must be communicated to the Technical Committee which will reassess the approval of the technology.

The RecyClass PO films Technical Committee was requested to carry out an assessment of the technology 'VO+ PE 1300 Series Voiding Agent' by VOID Technologies to verify its impact on the quality of recycled PE flexible packaging.

The technology tested is a cavitated PE-based three-layer coextruded film. This film contains 'VO+ PE 1300 Series Voiding Agent' in the internal layer alongside additional LLDPE resin, with the internal layer comprising 70% of the structure. In this film, the masterbatch represents 15% of the internal layer, meaning 10.5% of the total weight of the film. The masterbatch contains 40 wt% of LLDPE and 60 wt% of VO+ additive. In total, the amount of VO+ additive represents 6.3 wt% of the total film structure. The film has been tested unprinted.

According to the results that were obtained from the laboratory test performed by Plastic Forming Enterprises (PFE), carried out as per the Recyclability Evaluation Protocol for PE films, the 'VO+ PE 1300 Series Voiding Agent' technology is considered to be <u>fully compatible with PE flexibles recycling.</u>

Based on these results, RecyClass acknowledges that VOID Technologies 'VO+ PE 1300 Series Voiding Agent' technology will have no negative impact on the current European PE flexibles recycling provided that PE flexible packaging using this technology are designed only under the following conditions:

- a) The density of the PE film is below 0.97 g/cm<sup>3</sup>:
- a) The 'VO+ PE 1300 Series Voiding Agent' masterbatch represents less than 10.5% of the total weight of the film;

b) The polyethylene content in the structure is higher than 93.5 wt%;

c) The amount of VO+ additive represents less than 6.3% of the total weight of the film;

d) Any components or attachments to the packaging should be preferably made of clear PE;

e) Any additional component or features (inks, adhesives,  $\ldots$  ) of the packaging must be compliant

with the corresponding RecyClass Design for Recycling Guidelines.

RecyClass concludes that VOID Technologies 'VO+ PE 1300 Series Voiding Agent' technology as per

current market conditions and knowledge, is fully compatible with the existing European industrial

recycling processes for PE flexibles. The plastic generated by the recycling process, for a structure

respecting the aforementioned conditions, may be used in high quality applications such as PE blown

films up to  $25\%^1$ .

In regard to RecyClass Recyclability Certification, the present full compatibility with PE flexibles

recycling approval delivered to 'VO+ PE 1300 Series Voiding Agent' technology, means that a package

based on PE film containing the 'VO+ PE 1300 Series Voiding Agent' technology, as mentioned in the

aforementioned conditions, will not be penalised with a Recyclability Class downgrade. Nevertheless,

the amount of recyclable PE will impact the final Recyclability Class obtained during Recyclability

Certification and should be kept above 90% to maximise chances to get a Recyclability Certificate with

a Class A to C<sup>2</sup>. Also, it is noteworthy that the presence of additional packaging features, like the amount

and the chemistry of the inks for example, could impact the certification process.

About RecyClass

RecyClass is a non-profit, cross-industry initiative advancing recyclability, bringing transparency to the origin of plastic waste and establishing a harmonized approach toward recycled plastic calculation & traceability in Europe. RecyClass develops Recyclability Evaluation Protocols and scientific testing methods for innovative plastic packaging materials which serve as the

base for the Design for Recycling Guidelines and the RecyClass Online Tool. RecyClass established Recyclability Certifications for plastic packaging, Recycling Process Certification and Recycled Plastics Traceability Certification for plastic products.

PacyClass - Plastic Future is Circular

Follow the latest news on RecyClass channels: <u>LinkedIn | Twitter | YouTube</u>

Contact: Jean-Emile.Potaufeux@plasticsrecyclers.eu, www.recyclass.eu

<sup>1</sup> Technology tested according to the RecyClass Recyclability Evaluation Protocol for PE films

<sup>2</sup> RecyClass Recyclability Certification



c/o Plastics Recyclers Europe Phone: +32 2 786 39 08
Avenue de Broqueville 12 <u>info@recyclass.eu</u>
1150 Brussels, Brussels <u>www.recyclass.eu</u>



## Annex I

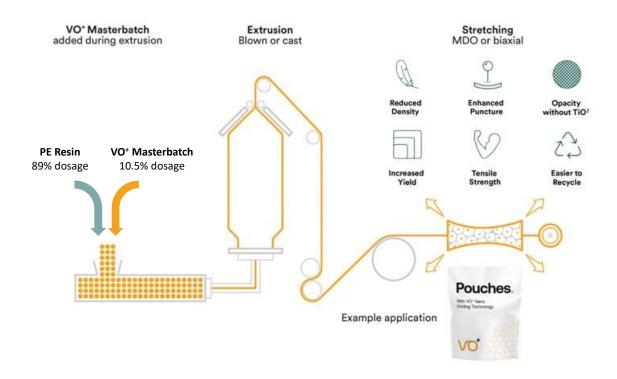


Figure 1 'VO+ PE 1300 Series Voiding Agent' technology by VOID Technologies