

VOID Technologies
RECYCLASS TECHNOLOGY APPROVAL

c/o Plastics Recyclers Europe Avenue de Broqueville 12 1150 Brussels, Brussels Phone: +32 2 786 39 08 info@recyclass.eu www.recyclass.eu

Brussels, 22 July 2022 Reviewed: Brussels, 19 December 2023

## **DISCLAIMER**

RecyClass recognition applies only to VOID Technologies 'VO+ PE masterbatch' technology reported in Annex I. The recyclability assessment therefore does not refer to the testing of a specific packaging using this technology. Any specific packaging using this technology would need to be tested individually to demonstrate that the system of resin, adjuvants, label, closure, and printing conforms to the RecyClass Recyclability Evaluation Protocol for PE films, and that it is sorted in the PE flexible stream at the state-of-art sorting plants in Europe.

Publication of results of testing of this technology MUST clearly include all the conditions listed in the approval letter. Partial reporting of the conditions is forbidden.

Additionally, any change in the formulation of the technology must be communicated to the Technical Committee which will reassess the approval of the technology.

The RecyClass PO films Technical Committee was requested by VOID Technologies to carry out an assessment of its 'VO+ PE Masterbatch' technology to verify its impact on the quality of recycled PE flexible packaging.

The technology tested was a VO+ MDO cavitated PE-based three-layer coextruded film. This film contains 'VO+ PE masterbatch' in the internal layer alongside additional LLDPE resin, with the internal layer comprising 70% of the structure. In this film, the masterbatch represents 15% of the internal layer, meaning 10.5% of the total weight of the film. The masterbatch contained 40 wt% of LLDPE and 60 wt% of VO+ additives. In total, the amount of additive represents 6.3wt% of the total film structure. The film has been tested unprinted.

According to the results that were obtained from the laboratory test done by Plastic Forming Enterprises (PFE), carried out as per the Recyclability Evaluation Protocol for PE films, the 'VO+ PE masterbatch' technology is considered to be <u>fully compatible</u> with <u>PE flexibles recycling</u>.

Based on these results, RecyClass acknowledges that VOID Technologies 'VO+ PE masterbatch' technology will have no negative impact on the current European PE flexibles recycling provided that PE flexible films using this technology are designed only under the following conditions<sup>1</sup>:

a) The density of the film is below 0.97 g/cm<sup>3</sup>;

<sup>&</sup>lt;sup>1</sup> PE films designed under conditions other than those indicated need to be tested to assess their compliance with Recyclass Recyclability Evaluation Protocol for PE films.

b) The 'VO+ PE masterbatch' represents less than 10.5% of the total weight of the film;

The polyethylene content in the structure is higher than 93.5 wt%;

d) The amount of VO+ additives represents less than 6.3% of the total weight of the film;

e) Any components or attachments to the packaging should be preferably made of clear PE;

Any additional component or features (inks, adhesives, ...) of the packaging must be

compliant with the corresponding RecyClass Design for Recycling Guidelines.

RecyClass concludes that VOID Technologies 'VO+ PE masterbatch' technology as per current market

conditions and knowledge, is fully compatible with the existing European industrial recycling processes

for PE flexibles. The plastic generated by the recycling process may be used in high quality applications

such as PE blown films up to 50%<sup>2</sup>.

In regard to RecyClass Recyclability Certification, the present full compatibility with PE flexibles

recycling approval delivered to 'VO+ PE masterbatch' technology, means that a package based on MDO-

PE film produced with the 'VO+ PE masterbatch' technology, as mentioned in the aforementioned

conditions, will not be penalised with a Recyclability Class downgrade. Nevertheless, the amount of

recyclable PE will impact the final Recyclability Class obtained during Recyclability Certification and

should be kept above 95% or 90% in the final packaging to maximise chances to get a Recyclability

Certificate with a Class B or C, respectively<sup>3</sup>. Also, it is noteworthy that the presence of additional

packaging features, like inks or decorations, could additionally impact the certification process.

About RecyClass

RecyClass is a non-profit, cross-industry initiative advancing recyclability, bringing transparency to the origin of plastic waste and establishing a harmonized approach toward recycled plastic calculation & traceability in Europe. RecyClass develops Recyclability Evaluation Protocols and scientific testing methods for innovative plastic packaging materials which serve as the base for the Design for Recycling Guidelines and the RecyClass Online Tool. RecyClass established Recyclability Certifications

for plastic packaging, Recycling Process Certification and Recycled Plastics Traceability Certification for plastic products.

Follow the latest news on RecyClass channels: <u>LinkedIn | Twitter | YouTube</u>

Contact: <u>Jean-Emile.Potaufeux@plasticsrecyclers.eu</u>, <u>www.recyclass.eu</u>

<sup>2</sup> Technology tested according to the RecyClass Recyclability Evaluation Protocol for PE films

<sup>3</sup> RecyClass Recyclability Certification



Avenue de Broqueville 12 1150 Brussels, Brussels

Phone: +32 2 786 39 08 info@recyclass.eu www.recyclass.eu

## <u>Annex I</u>

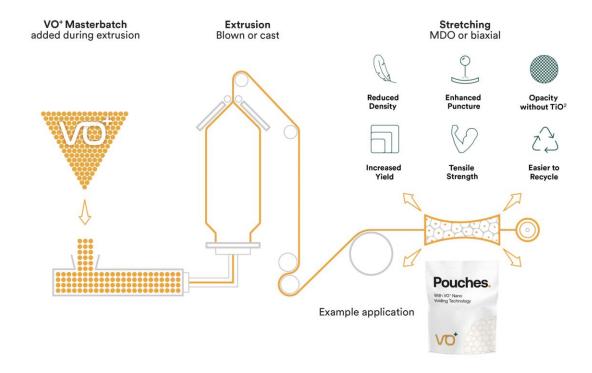


Figure 1 'VO+ PE masterbatch' technology by VOID Technologies

